


LEDINNOVATIE B.V.B.A



AC 100V-240V
Ra >75



High power COB LED light Source, with high CRI, high Lumen output
the housing is made of aluminum alloy and molded by intergrated die casting, using reflector with high efficiency, the luminous is uniform
surface treated by powder coating, and different colors are optional, according to customer's requirements
the radiation angle can be adjustable

Application:
Shops, hotel, office, school, hospital, underground garage, gallery, Supermarket, Restaurant etc.

sales@ledinnovatie.be


www.ledinnovatie.be

info@ledinnovatie.be


Ledinnovatie BVBA Nieuwkerkenstraat 180 9100 Nieuwkerken-Waas Belgium

LEDINNOVATIE B.V.B.A

20Watt

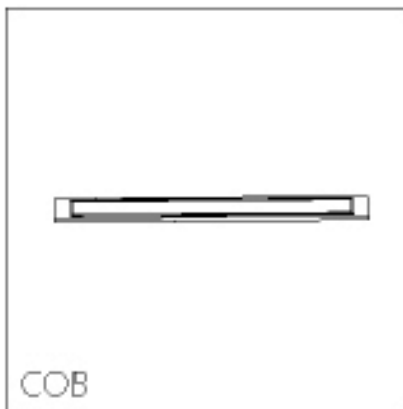


COB

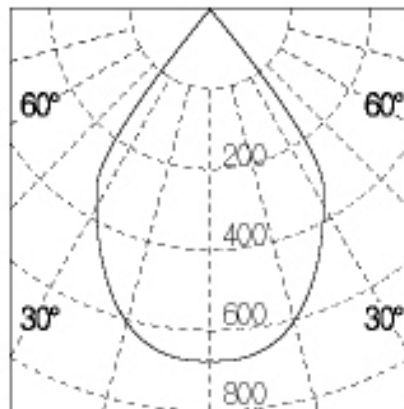


cd/Klm

H(m)	E(lx)	D(m)
Beam Angle: 75°		
1 m	210.3 lx	1.75 m
2 m	50.5 lx	3.51 m
3 m	21.0 lx	5.26 m
4 m	11.3 lx	7.02 m
5 m	7.5 lx	8.77 m

25Watt

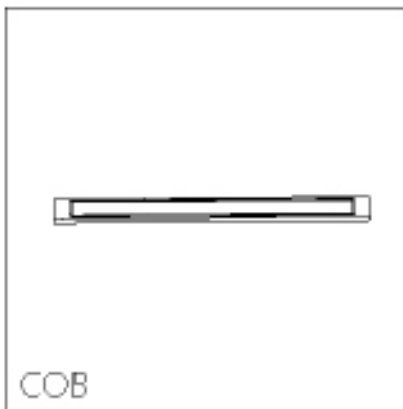


COB

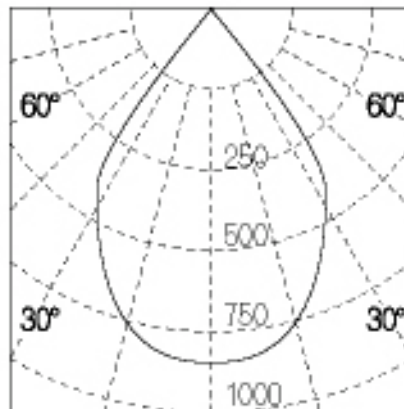


cd/Klm

H(m)	E(lx)	D(m)
Beam Angle: 75°		
1 m	223.3 lx	1.75 m
2 m	55.8 lx	3.51 m
3 m	24.8 lx	5.26 m
4 m	14.0 lx	7.02 m
5 m	8.9 lx	8.77 m

30Watt

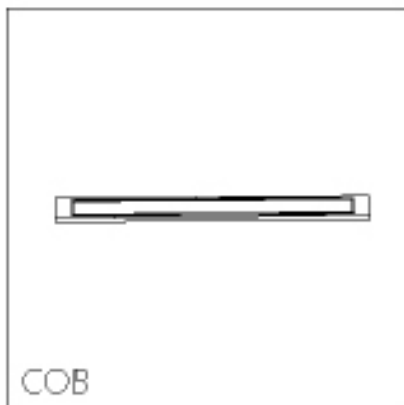

COB

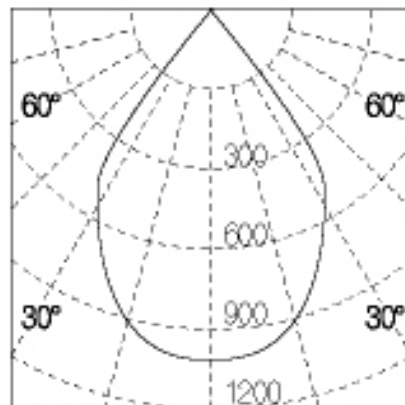

cd/Klm

H(m)	E(lx)	D(m)
Beam Angle: 75°		
1 m	250.3 lx	1.75 m
2 m	66.5 lx	3.51 m
3 m	38.8 lx	5.26 m
4 m	22.0 lx	7.02 m
5 m	14.5 lx	8.77 m



sales@ledinnovatie.be

www.ledinnovatie.be

info@ledinnovatie.be


LEDINNOVATIE B.V.B.A

40Watt

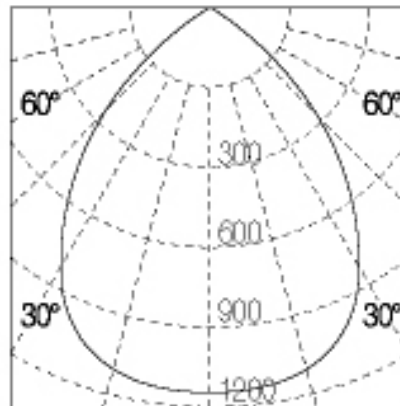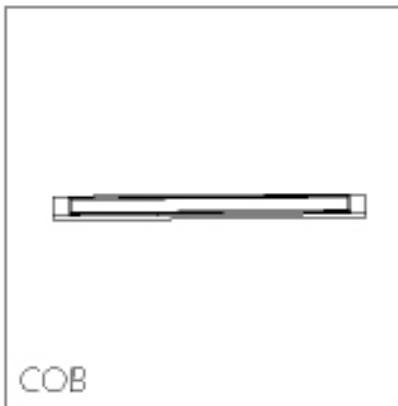

H(m)	E(lx)	D(m)
Beam Angle: 75°		
1 m	316.4 lx	1.69 m
2 m	79.1 lx	3.39 m
3 m	35.2 lx	5.08 m
4 m	19.8 lx	6.77 m
5 m	12.7 lx	8.47 m

Power	Current	Color	Lumen	Beam angle
20W	1000mA	3000K	1000 lm	85°
		6000K	1200 lm	
25W	1250mA	3000K	1400 lm	85°
		6000K	1600 lm	
30W	1000mA	3000K	1800 lm	85°
		6000K	1900 lm	
40W	1300mA	3000K	2100 lm	85°
		6000K	2400 lm	



sales@ledinnovatie.be

www.ledinnovatie.be

info@ledinnovatie.be

Ledinnovatie BVBA Nieuwkerkenstraat 180 9100 Nieuwkerken-Waas Belgium