


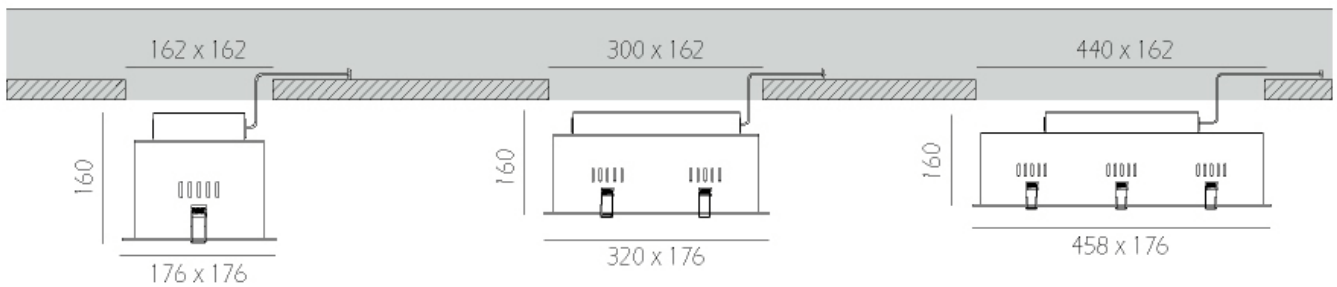


LEDINNOVATIE B.V.B.A

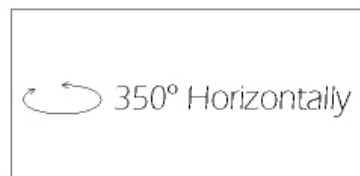

AC 100V-240V
Ra > 75

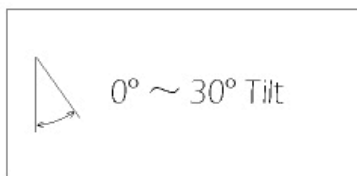

sales@ledinnovatie.be

www.ledinnovatie.be

info@ledinnovatie.be


Ledinnovatie BVBA Nieuwkerkenstraat 180 9100 Nieuwkerken-Waas Belgium

LEDINNOVATIE B.V.B.A


High Power COB LED, with clear glass
Constant Current Power Supply
Housing: Aluminum, designed as heat sink
Mounting ring: Pure Aluminum, white or silver color
Inner and outer ring: Pure Aluminum, satin anodized black
LED module: High Power 15W COB LED
Reflector: Aluminum, anodized silver,
Spring: Electrolysis plate
Work temperature: -20 degree to 50 degree

Application:

Hotel, Government Institute, Office, school, Hospital,
Underground parking, gallery, Supermarket, Shopping mall,
Restaurant etc.



1 x 20Watt

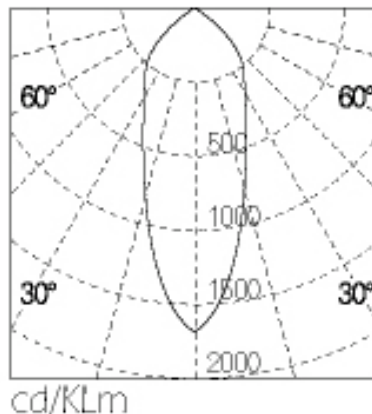

H(m)	E(lx)	D(m)
	Beam Angle: 45°	
1 m	152 lx	0.6 m
2 m	38 lx	1.19 m
3 m	16.9 lx	1.79 m
4 m	9.5 lx	2.39 m
5 m	6.1 lx	2.99 m

sales@ledinnovatie.be




www.ledinnovatie.be

info@ledinnovatie.be

Ledinnovatie BVBA Nieuwkerkenstraat 180 9100 Nieuwkerken-Waas Belgium

LEDINNOVATIE B.V.B.A

Power	Current	Color	Lumen	Beam angle
20W	1000mA	3000K	1000lm	45°
		6000K	1200lm	
2 x 20W	1000mA	3000K	1900lm	45°
		6000K	2100lm	
3 x 20W	1000mA	3000K	2900lm	45°
		6000K	3200lm	

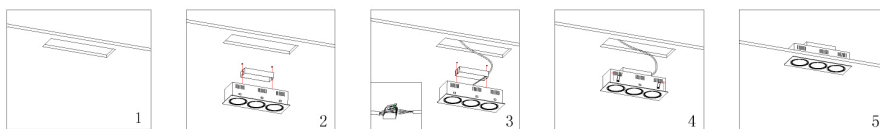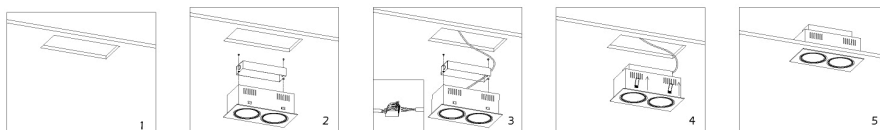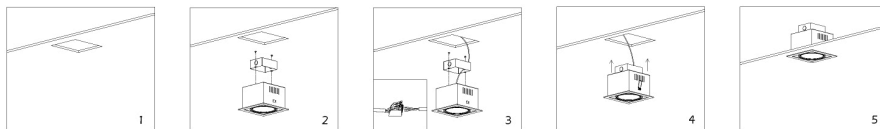

sales@ledinnovatie.be

www.ledinnovatie.be

info@ledinnovatie.be

Ledinnovatie BVBA Nieuwkerkenstraat 180 9100 Nieuwkerken-Waas Belgium